




# T8LED SERIES

## T8 TUBE LED REPLACEMENT

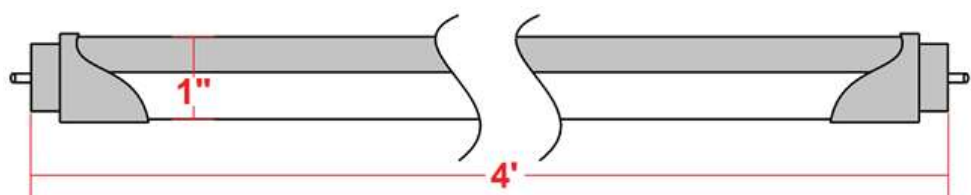


### INSTALLATION

Jarvis T8LED can be installed using both ends with the existing ballast still in place.

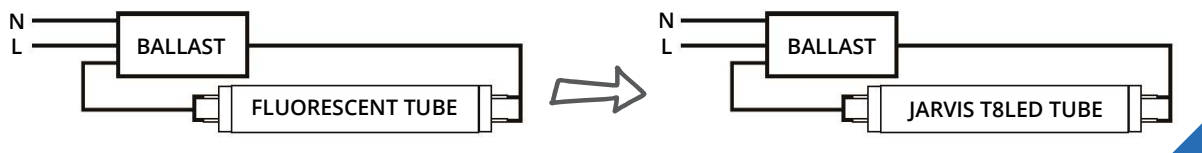

Jarvis T8LED can be installed using either end with 120-277V line voltage.

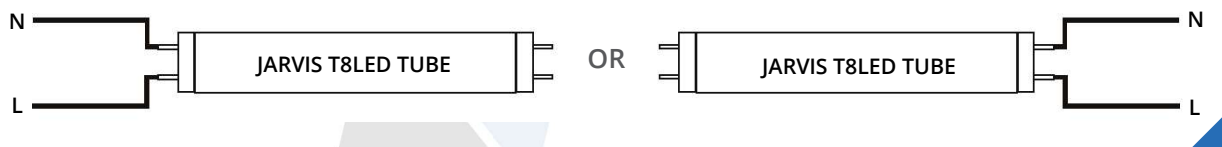

### CONSTRUCTION & COMPATIBILITY

- High efficiency LED array
- Easy to install standard T8 tube size
- Compatible with existing ballast or direct line voltage
- White finish tube with clear lens for maximum light output
- UL Listed and DesignLights Consortium™ Qualified Product

### ELECTRICAL & LIGHT OUTPUT SPECIFICATIONS

MODEL	SIZE	INPUT	POWER	LUMENS	CCT	CRI	PF
T8LED-12W-40K	4' LONG, 1" DIAMETER	120-277V OR WITH BALLAST	12W	1,680 lm	4000K	80	.9

