

HUSKY X NOZZLE

AUTOMATIC NOZZLE

Automatic shut off nozzle for full-service and self-service stations.

- X nozzle shuts off when the gas tank is full.
- Equipped with a unique Flo-Stop™ device that shuts off the nozzle if it falls from the fill tank or raises above the horizontal.
- Aluminum reinforced spout bushing keeps spout tip round and acts as a captive fastener to prevent tip-end sensor damage.

- *StreamShaper™* reduces turbulence for straighter fuel flow and less splash back spillage.
- Comes standard with smooth full grip guard.



SPECIFYING INFORMATION

Model Number	Description	Shipping Weight ^{lbs (kg)}
New Unleaded Nozzles:		
159404	with Three Notch Hold Open Clip	3.0 (1.3)
E159404	with Three Notch Hold Open Clip and Mate Guard	3.1 (1.3)
159408	without Hold Open Clip	3.0 (1.3)
E159408	without Hold Open Clip, with Mate Guard	3.0 (1.3)
159424	with Three Notch Hold Open Clip and Sightglass	2.9 (1.3)
159454	with Three Notch Hold Open Clip and Flo-Equalizer™	3.0 (1.3)
159458	without Hold Open Clip, with Flo-Equalizer™	3.0 (1.3)
159464	with Three Notch Hold Open Clip and Waffle Splash Guard	2.7 (1.2)
159468	without Hold Open Clip, with Waffle Splash Guard	2.7 (1.2)

New Light Duty Diesel Nozzles:


159403	with Three Notch Hold Open Clip	3.1 (1.4)
E159403	with Three Notch Hold Open Clip and Mate Guard	3.1 (1.4)
159407	without Hold Open Clip	3.0 (1.3)
E159407	without Hold Open Clip, with Mate Guard	3.0 (1.3)
159453	with Three Notch Hold Open Clip and Flo-Equalizer™	3.1 (1.4)
159457	without Hold Open Clip, with Flo-Equalizer™	3.1 (1.3)
159463	with Three Notch Hold Open Clip and Waffle Splash Guard	2.8 (1.2)
159467	without Hold Open Clip, with Waffle Splash Guard	2.8 (1.2)

CONSTRUCTION

Body	One piece die cast aluminum
Seals	Fluorocarbon
Packing	Double o-ring seal protected by fiber reinforced Teflon
Lever	One piece contoured steel with hard plastic cover
Inlet	3/4" / 19 mm NPTF

LISTINGS

Listings:

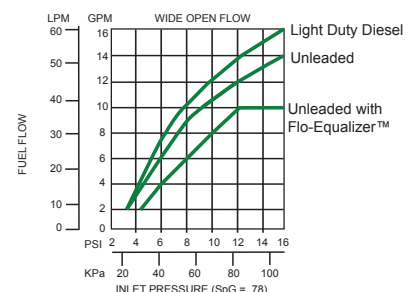

CONVENTIONAL FUELING

HUSKY X NOZZLE

AUTOMATIC NOZZLE

- **Dimensions**
- **Accessories**



Safe-T-Breaks®

Model No.	Description
3360	3/4" F x 3/4" F NPTF Reconnectable Safe-T-Break®
2273	3/4" F x 3/4" F NPTF Non-Reconnectable Safe-T-Break®
6130	3/4" F x 3/4" F NPTF Non-Reconnectable PCC Safe-T-Break®
5230	3/4" F x 3/4" F NPTF Low Pull Reconnectable Safe-T-Break®

Swivel

Model No.	Description
0350	3/4" M x 3/4" F NPTF Multi-Plane Swivel
0350W	3/4" M x 3/4" F NPTF Multi-Plane Swivel with Warm Weather Seals
0355	3/4" M x 3/4" F NPTF Multi-Plane Swivel Anodized Black
2272	3/4" M x 3/4" F NPTF 90° Pump Swivel
3895	3/4" M x 3/4" F NPTF Inline Swivel
2950	3/4" M x 3/4" F NPTF Multi-Plane Restricted Swivel

Swivel•Safe-T-Break® Combo

Model No.	Description
6310	3/4" M NPTF Multi-Plane Swivel connected to 3/4" F NPTF Reconnectable Safe-T-Break®

Spouts

Model No.	Description
1473	Unleaded Spout w/o Flo-Stop™
1471	Light Duty Diesel Spout w/o Flo-Stop™

Guards

Model No.	Description
4145	Full Grip Guard
6665	POPD™ Full Grip Guard
1806	Full Grip Reguard
7205	POPD™ Full Grip Reguard
3795	Mate Guard
7815	POPD™ Mate Guard
1808	Waffle Splash Guard
1506	Protection Package
1809	Reguard Protection Package
3440	Mate Easy-on Package
6628	POPD™ Clear Cover
5494	Lever Guard
3376	Black Handle Guard

Flo-Equalizers™

Model No.	Description
4490	Conventional Flo-Equalizer™ - 10 gpm / 37.9 Lpm
7490	Internal Flo-Equalizer™ - 10 gpm / 37.9 Lpm

Testing and Maintenance Equipment

Model No.	Description
7089	Nozzle Service Kit
3593	Hold Open Clip Kit
0397	Unleaded Spout Gauge

