

HUSKY XS® NOZZLE

PRESSURE ACTIVATED AUTOMATIC NOZZLE

Pressure activated, automatic shut off nozzle for self-service, full-service and unattended stations.

- XS® nozzle shuts off:
 - when the pump shuts off.
 - when the gas tank is full.
 - when the lever is opened before the pump is turned on.
 - when the leak detector has not completed its test cycle.
- Aluminum reinforced spout bushing keeps spout tip round and acts as a captive fastener to prevent tip-end sensor damage.

- Equipped with a unique Flo-Stop™ device that shuts off the nozzle if it falls from the fill tank or raises above the horizontal.

- *StreamShaper™* reduces turbulence for straighter fuel flow and less splash back spillage.


- Comes standard with smooth full grip guard.



LISTINGS



MADE IN THE U.S.A.

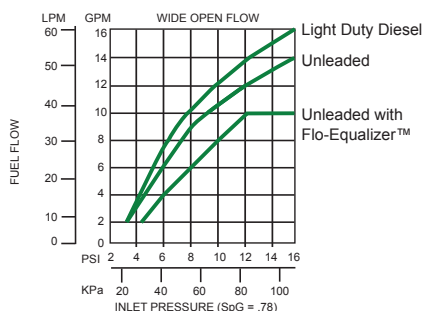

SPECIFYING INFORMATION

Model Number	Description	Shipping Weight ^{(lbs (kg))}
New Unleaded Nozzles		
159504	w/ Three Notch Hold Open Clip	3.1 (1.4)
E159504	w/ Three Notch Hold Open Clip & Mate Guard	3.1 (1.4)
159508	without Hold Open Clip	3.1 (1.4)
E159508	without Hold Open Clip, w/ Mate Guard	3.1 (1.4)
159524	w/ Three Notch Hold Open Clip & Sightglass	2.9 (1.3)
159543	w/ Single Notch Hold Open Clip & 1808 Waffle Splash Guard	3.1 (1.4)
159544	w/ Three Notch Hold Open Clip, 1808 Waffle Splash Guard & Flo-Equalizer™	3.2 (1.4)
159554	w/ Three Notch Hold Open Clip & Flo-Equalizer™	3.1 (1.4)
159558	without Hold Open Clip w/ Flo-Equalizer™	3.1 (1.4)
159559	w/ Three Notch Hold Open Clip & 1808 Waffle Splash Guard	3.0 (1.3)
159566	without Hold Open Clip w/ 1808 Waffle Splash Guard	3.0 (1.3)
159576	w/ Three Notch Hold Open Clip & 1807 Waffle Splash Guard	3.0 (1.3)
159579	without Hold Open Clip w/ 1807 Waffle Splash Guard	3.0 (1.3)
159589	w/ Single Notch Hold Open Clip, POPD™ Full Grip Guard & 1808 Waffle Splash Guard	3.0 (1.3)
159595	w/ Three Notch Hold Open Clip, POPD™ Full Grip Guard & 1808 Waffle Splash Guard	3.1 (1.4)
New Light Duty Diesel Nozzles		
159503	w/ Three Notch Hold Open Clip	3.1 (1.4)
E159503	w/ Three Notch Hold Open Clip & Mate Guard	3.1 (1.4)
159507	without Hold Open Clip	3.1 (1.4)
E159507	without Hold Open Clip w/ Mate Guard	3.1 (1.4)
159545	w/ Three Notch Hold Open Clip, 1808 Waffle Splash Guard & Flo-Equalizer™	3.2 (1.4)
159553	w/ Three Notch Hold Open Clip & Flo-Equalizer™	3.1 (1.4)
159557	without Hold Open Clip w/ Flo-Equalizer™	3.1 (1.4)
159561	w/ Three Notch Hold Open Clip & 1808 Waffle Splash Guard	3.0 (1.3)
159567	without Hold Open Clip w/ 1808 Waffle Splash Guard	3.1 (1.4)
159577	w/ Single Notch Clip, POPD™ Full Grip Guard & 1808 Waffle Splash Guard	3.3 (1.4)
159578	w/ Three Notch Hold Open Clip, & 1808 Waffle Splash Guard	3.3 (1.4)
159580	without Hold Open Clip w/ 1807 Waffle Splash Guard	3.1 (1.4)
159585	w/ Single Notch Hold Open Clip, 1808 Waffle Splash Guard & Flo-Equalizer™	3.1 (1.4)
159596	w/ Three Notch Hold Open Clip, POPD™ Full Grip Guard & 1808 Waffle Splash Guard	3.3 (1.4)
159597	w/ Single Notch Hold Open Clip & 1808 Waffle Splash Guard	3.1 (1.4)

CONSTRUCTION

Body	One piece die cast aluminum
Seals	Fluorocarbon
Packing	Double o-ring seal protected by fiber reinforced Teflon
Lever	One piece contoured steel with hard plastic cover
Inlet	¾" / 19.1 mm NPTF

CONVENTIONAL FUELING

Rev. 7-10

2-1

HUSKY XS® NOZZLE

PRESSURE ACTIVATED AUTOMATIC NOZZLE

- **Dimensions**
- **Accessories**



Safe-T-Breaks®

Model No.	Description
3360	3/4" F x 3/4" F NPTF Reconnectable Safe-T-Break®
2273	3/4" F x 3/4" F NPTF Non-Reconnectable Safe-T-Break®
6130	3/4" F x 3/4" F NPTF Non-Reconnectable PCC Safe-T-Break®
5230	3/4" F x 3/4" F NPTF Low Pull Reconnectable Safe-T-Break®

Swivels

Model No.	Description
0350	3/4" M x 3/4" F NPTF Multi-Plane Swivel
0350W	3/4" M x 3/4" F NPTF Multi-Plane Swivel with Warm Weather Seals
0355	3/4" M x 3/4" F NPTF Multi-Plane Swivel Anodized Black
2272	3/4" M x 3/4" F NPTF 90° Pump Swivel
3895	3/4" M x 3/4" F NPTF Inline Swivel
2950	3/4" M x 3/4" F NPTF Multi-Plane Restricted Swivel

Swivel-Safe-T-Break® Combo

Model No.	Description
6310	3/4" M NPTF Multi-Plane Swivel connected to 3/4" F NPTF Reconnectable Safe-T-Break®

Spouts

Model No.	Description
1473	Unleaded Spout without Flo-Stop™
1471	Light Duty Diesel Spout without Flo-Stop™

Guards

Model No.	Description
4145	Full Grip Guard
6665	POPD™ Full Grip Guard
1806	Full Grip Reguard
7205	POPD™ Full Grip Guard
3795	Mate Guard
7815	POPD™ Mate Guard
1808	Waffle Splash Guard
1506	Protection Package
1809	Reguard Protection Package
3440	Mate Easy-on Package
6628	POPD™ Clear Cover
5494	Lever Guard
3376	Black Handle Guard

Flo-Equalizers™

Model No.	Description
4490	Conventional Flo-Equalizer™ - 10 gpm / 37.9 Lpm
7490	Internal Flo-Equalizer™ - 10 gpm / 37.9 Lpm

Test Equipment

Model No.	Description
7089	Nozzle Service Kit
3593	Hold Open Clip Kit
0397	Unleaded Spout Gauge

