

HUSKY VIIIS NOZZLE

HEAVY DUTY DIESEL PRESSURE ACTIVATED AUTOMATIC NOZZLE

Pressure activated, automatic shut off nozzle for truck stop and other high volume self-service, full-service and unattended stations.

- VIIIS nozzle shuts off:
 - when the pump shuts off.
 - when the gas tank is full.
 - when the lever is opened before the pump is turned on.
 - when the leak detector has not completed its test cycle.

- Equipped with a unique Flo-Stop™ device that shuts off the nozzle if it falls from the fill tank or raises above the horizontal.



- Spout is reinforced with thick aluminum bushing that retains spout spring and keeps spout from rounding-in -- the two leading causes of clicking-off and splash-back spillage.
- Nozzle comes standard with full grip guard and waffle splash guard.

SPECIFYING INFORMATION

Model Number	Description	Shipping Weight ^{lbs (kg)}
New Heavy Duty Diesel Nozzles w/ NPTF Threads:		
177610	w/ Three Notch Hold Open Clip, Waffle Splash Guard and Spout Bushing	4.6 (2.0)
17761001	w/ Three Notch Hold Open Clip, Waffle Splash Guard, Long Spout and Spout Bushing	4.6 (2.0)
177690	w/ Three Notch Hold Open Clip, POPD™ Full Grip Guard, Waffle Splash Guard and Spout Bushing	4.6 (2.0)
177612	w/o Hold Open Clip, w/ Waffle Splash Guard and Spout Bushing	4.6 (2.0)
504010	w/ Three Notch Hold Open Clip and Waffle Splash Guard w/o Spout Bushing	4.6 (2.0)
504012	w/o Hold Open Clip and Spout Bushing, w/ Waffle Splash Guard	4.6 (2.0)
Rebuilt Heavy Duty Diesel Nozzles w/ NPTF Threads:		
266010	w/ Three Notch Hold Open Clip, Waffle Splash Guard and Spout Bushing	4.6 (2.0)
266012	w/o Hold Open Clip, w/ Waffle Splash Guard and Spout Bushing	4.6 (2.0)
503510	w/ Three Notch Hold Open Clip and Waffle Splash Guard w/o Spout Bushing	4.6 (2.0)
503512	w/o Hold Open Clip and Spout Bushing, w/ Waffle Splash Guard	4.6 (2.0)

CONSTRUCTION


Body	Aluminum
Seals	Fluorocarbon
Packing	Double o-ring seal protected by fiber reinforced Teflon
Lever	One piece contoured steel
Inlet	1" / 25.4 mm NPTF

LISTINGS

Listings:



MADE IN THE U.S.A.

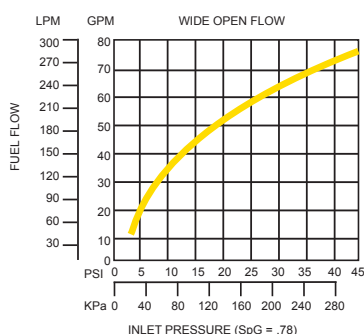

TRUCK & HIGH
VOLUME


Rev 7-10

3-1

HUSKY VIIIS NOZZLE

HEAVY DUTY DIESEL PRESSURE ACTIVATED AUTOMATIC NOZZLE

- **Dimensions**
- **Accessories**

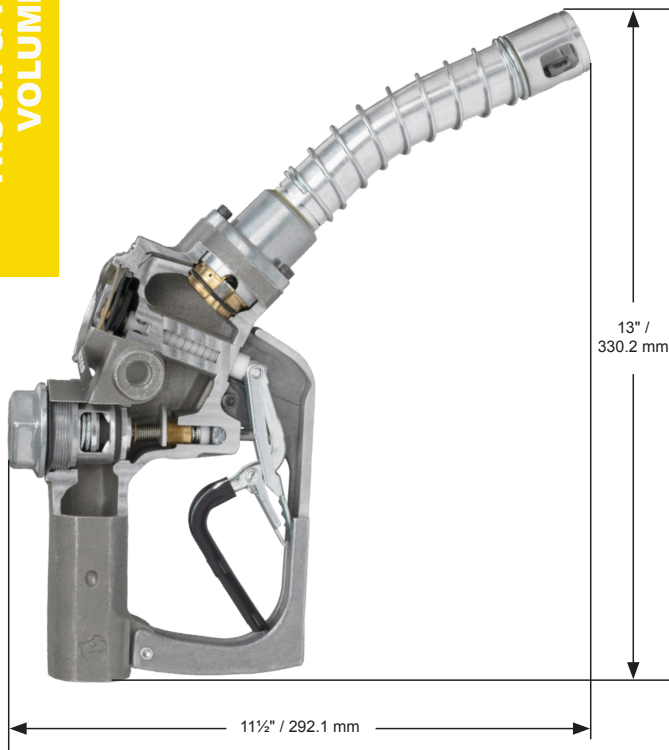

Safe-T-Breaks®

Model No.	Description
2276	1" F x 1" F Reconnectable Safe-T-Break®
5812	1" F x 1" F Non-Reconnectable Safe-T-Break®
6301	1" F x 1" F Non-Reconnectable PCC Safe-T-Break®
5231	1" F x 1" F Low Pull Reconnectable Safe-T-Break®

Swivels

Model No.	Description
0087	1" M x 1" F Multi-Plane Swivel
0087W	1 M x 1" F Multi-Plane Swivel with Warm Weather Seals
4860	1" M x 1" F Multi-Plane High Volume Swivel
0095	1" M x 1" F Multi-Plane 70° Pump Swivel
3395	1" M x 1" F Multi-Plane Restricted Swivel

Swivel•Safe-T-Break® Combo

Model No.	Description
5969	1" M Multi-Plane Swivel connected to 1" F Reconnectable Safe-T-Break®

Spouts

Model No.	Description
2279	Complete Spout Assembly w/ Spout Bushing
5017	Complete Spout Assembly w/o Spout Bushing
3589	Complete Long Spout Assembly w/ Spout Bushing

Guards

Model No.	Description
4740	Full Grip Guard
7352	POPD™ Full Grip Guard w/ Clear Cover
5516	Full Grip Reguard
1808	Waffle Splash Guard
6628	POPD™ Clear Cover
5494	Lever Guard

Testing and Maintenance Equipment

Model No.	Description
7089	Nozzle Service Kit
3593	Hold Open Clip Kit

