

HUSKY 1HS NOZZLE

AUTOMATIC SHUT-OFF NOZZLE


Automatic shut-off nozzle for dispensing up to 25 gpm / 94.6 Lpm.

- 1HS nozzles shuts off when the tank is full.
- Equipped with a unique Flo-Stop™ device that shuts off the nozzle if it falls from the fill tank or raises above the horizontal.

- Accu-Flo™ poppet allows “to-the-penny” fuel dispensing.
- Nozzle comes standard with full grip guard and lever cover.



LPM GPM WIDE OPEN FLOW

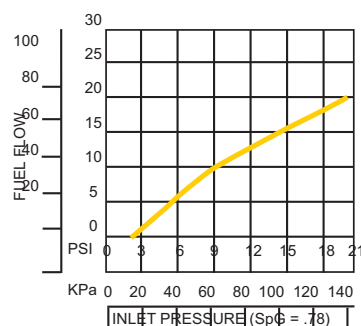

SPECIFYING INFORMATION

Model Number	Description	Weight lbs.(kg.)
New Diesel Nozzles w/ NPTF Threads		
026810	with Three Notch Hold Open Clip	3.4 (1.5)
026865	with Three Notch Hold Open Clip and Waffle Splash Guard	3.6 (1.6)
026890	with Three Notch Hold Open Clip, POPD Full Grip Guard and Waffle Splash Guard	3.0 (1.3)
026812	without Hold Open Clip	3.4 (1.5)
Rebuilt Diesel Nozzles w/ NPTF Threads		
052410	with Three Notch Hold Open Clip	3.4 (1.5)
052465	with Three Notch Hold Open Clip and Waffle Splash Guard	3.3 (1.4)
052412	without Hold Open Clip	3.4 (1.5)
New Diesel Nozzles w/ BSPP Threads		
026838	with Three Notch Hold Open Clip	3.4 (1.5)
026840	without Hold Open Clip	3.4 (1.5)
Rebuilt Diesel Nozzles w/ BSPP Threads		
052438	with Three Notch Hold Open Clip	3.4 (1.5)

CONSTRUCTION

Body	Die cast aluminum body with high impact polymer hand guard
Seals	Fluorocarbon
Packing	Double o-ring seal protected by fiber reinforced Teflon
Lever	One piece contoured steel with hard plastic cover
Inlet	1" / 25.4 mm NPTF & BSPP

PATENTS and LISTINGS

Patent Numbers: 4,809,753

Listings: 




TRUCK & HIGH VOLUME

HUSKY 1HS NOZZLE

AUTOMATIC SHUT-OFF NOZZLE

- **Dimensions**
- **Accessories**

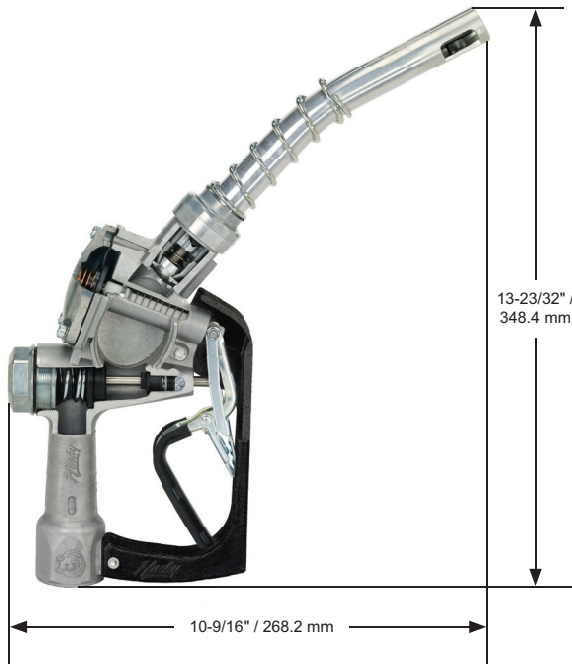

Safe-T-Breaks®

Model No.	Description
2276	1" F x 1" F NPTF Reconnectable Safe-T-Break®
5812	1" F x 1" F NPTF Non-Reconnectable Safe-T-Break®
6301	1" F x 1" F NPTF Non-Reconnectable PCC Safe-T-Break®
5231	1" F x 1" F NPTF Low Pull Non-Reconnectable Safe-T-Break®
3076	1" F x 1" F BSPP Reconnectable Safe-T-Break®
3076A	1" F x 1" F BSPP Reconnectable Safe-T-Break® - Atex
6914	1" F x 1" F BSPP Non-Reconnectable Safe-T-Break®

Swivels

Model No.	Description
0087	1" M x 1" F NPTF Multi-Plane Swivel
0087W	1" M x 1" F NPTF Multi-Plane Swivel with Warm Weather Seals
4860	1" M x 1" F NPTF Multi-Plane High Flow Swivel
0095	1" M x 1" F NPTF 70° Pump Swivel
3395	1" M x 1" F NPTF Multi-Plane Restricted Swivel
3306	1" M x 1" F BSPP Multi-Plane Swivel
3306W	1" M x 1" F BSPP Multi-Plane Swivel with Warm Weather Seals
6949	1" M x 1" F BSPP Multi-Plane High Flow Swivel

Swivel-Safe-T-Break® Combo

Model No.	Description
5969	1" M NPTF Multi-Plane Swivel connected to 1" F NPTF Reconnectable Safe-T-Break®

Spouts

Model No.	Description
5215	Heavy Duty Diesel Spout with Flo-Stop™

Guards

Model No.	Description
0554	Full Grip Nozzle Guard
6655	POPD™ Full Grip Nozzle Guard
0099	Protection Package
1804	Full Grip Nozzle Reguard
7210	POPD™ Full Grip Nozzle Reguard
1811	Reguard Package
0226	Mate Nozzle Guard
	POPD™ Mate Guard w/ Clear Cover
1808	Waffle Splash Guard
6628	POPD™ Clear Cover
5494	Lever Guard
7376	Mate Handle Cover

Accessories

Model No.	Description
7089	Nozzle Service Kit
3593	Hold Open Clip Kit

