

# HUSKY V34 NOZZLE

## VACUUM ASSIST NOZZLE

VAPORVAC® (GILBARCO), WAYNE® VAC (WAYNE), MAXVAC™ (TOKHEIM) SYSTEMS

### Pressure Activated Vacuum Assist Nozzle for self service, full service and unattended stations.

- V34 Nozzle shuts off when
  - the pump shuts off.
  - the gas tank is full.
  - the lever is opened before the pump is turned on.
  - the leak detector has not completed the test cycle.
- Strong vapor valve in the nozzle that is mechanically operated by the on-off action of the nozzle's lever.
- Nozzle is equipped with a unique Flo-Stop™ device that shuts off the nozzle if it falls from the fill tank or raises above the horizontal.
- StreamShaper™ reduces turbulence for straighter fuel flow and less splash back spillage.
- Husky vapor return line is an internal part of the body casting, thus eliminating potential vapor leak points and fugitive evaporative emissions from the fuel remaining in the vapor path of the hose.
- Uses conventional spout with spout ring and soft vapor escape guard.
- Vapor assist is achieved at the body end of the spout where a vapor ring captures emissions.
- Nozzle spout is covered by a one year warranty.



### SPECIFYING INFORMATION

Model Number	Description	Shipping Weight <sup>lbs (kg)</sup>
--------------	-------------	-------------------------------------

#### New Unleaded Nozzles

6250041	with Three Notch Hold Open Clip	4.0 (1.8)
6250041A	with Three Notch Hold Open Clip - Atex	4.0 (1.8)
6250241	with Three Notch Hold Open Clip and Sightglass	4.0 (1.8)
6250941	with Three Notch Hold Open Clip and POPD™ Full Grip Guard	4.0 (1.8)
62501001	with Three Notch Hold Open Clip POPD™ Full Grip Guard and Sightglass	4.0 (1.8)
6250431	with Single Notch Hold Open Clip	4.0 (1.8)
6250891	with Single Notch Hold Open Clip and POPD™ Full Grip Guard	4.0 (1.8)
6250081	without Hold Open Clip	4.0 (1.8)

#### Rebuilt Unleaded Nozzles

6254041	with Three Notch Hold Open Clip	3.7 (1.6)
6254241	with Three Notch Hold Open Clip and Sightglass	3.7 (1.6)
6254081	without Hold Open Clip	3.7 (1.6)

### CONSTRUCTION

Body	Aluminum
Seals	Fluorocarbon
Packing	Fiber Reinforced Teflon
Lever	One piece contoured steel with hard plastic cover
Inlet	M34 x 1.5



### PATENTS and LISTINGS

Patent Numbers: 5,394,900

Listings:



MADE IN THE U.S.A.




# HUSKY V34 NOZZLE

## VACUUM ASSIST NOZZLE

VAPORVAC® (GILBARCO), WAYNE®VAC (WAYNE), MAXVAC™ (TOKHEIM) SYSTEMS

- **Dimensions**
- **Accessories**

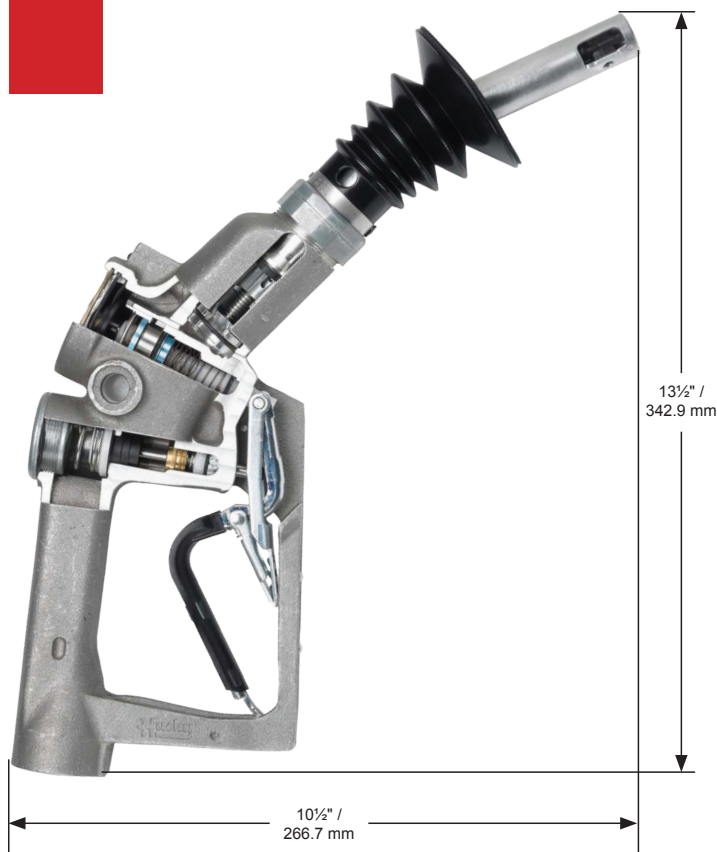

### Safe-T-Breaks®

Model No.	Description
4034	Reconnectable Safe-T-Break®
4034A	Reconnectable Safe-T-Break® - Atex
6210	Non-Reconnectable Safe-T-Break®
5134A	Non-Reconnectable Safe-T-Break® - Atex

### Swivel

Model No.	Description
4605	Inverted Vapor Assist Swivel

### Pressure / Vacuum Vents

Model No.	Description
4620	2" Slip-On Pressure Vacuum Vent
4885	2" Thread-On Pressure Vacuum Vent - NPTF
5885	2" Thread-On Pressure Vacuum Vent with internal screen - NPTF
7525	2" Thread-On Pressure Vacuum Vent - BSPT
7457	2" Thread-On Pressure Vacuum Vent with internal screen - BSPT
5041	3" Thread to 2" Thread Pipe Adaptor
5426	Pressure Vacuum Vent Test Adaptor

### Spouts

Model No.	Description
6291	Complete Spout Assembly Kit - Unleaded
6391	Unleaded Spout

### Guards

Model No.	Description
4000	Vapor Splash Guard (VSG) with Clamp
4039	Vapor Splash Guard Clamp
6951	Full Grip Guard
6660	POPD™ Full Grip Guard
4231	Full Grip Reguard
7220	POPD™ Full Grip Reguard
6628	POPD™ Clear Cover
5494	Lever Guard

### Flo-Equalizers™

Model No.	Description
5837	Vapor Assist Flo-Equalizer™

### Testing Equipment

Model No.	Description
7089	Nozzle Service Kit
3593	Hold Open Clip Kit
6497	VSG Clamp Tool
0397	Unlead Spout Gauge
4360	Air/Liquid Spout Adaptor
5260	Tool for dry Air/Liquid Test
5233	O-ring Kit

