

Enhanced Conventional (ECO) Nozzles



Automatic shut-off conventional nozzle equipped with a mechanical interlock that shuts off the nozzle if it falls from the fill tank.

- Unique internal interlock device that shuts off the fuel flow before the spout is out of the tank.
- Lightest insertion “force” of any safety interlock operated nozzle.
- Comes standard with smooth full grip guard.
- CARB compliant for drips, spills, spitting and liquid retention.
- 2-piece lever is easier to use:
 - requires ½ the force to open nozzle.
 - ADA compliant.
- Unique tilt poppet maximizes “to-the-penny” dispensing.
- Cold weather version contains a poppet disc seal rated to -40° F/C to prevent fuel leakage from the main seal in extreme cold
- A reinforced stainless steel spout bushing keeps spout tip round and acts as a captive fastener to prevent tip-end sensor damage.
- Drip Less spout reduces/eliminates drips from spout.
- *StreamShaper*® reduces turbulence for straighter fuel flow and less splash back spillage.



New Unleaded Nozzles


MODEL NO.	DESCRIPTION	SHIPPING WEIGHT LBS (KG)
1190404	with Two Notch Hold Open Clip, EZ Lever and Drip Less Spout	2.8 (1.3)
1190408	without Hold Open Clip, with EZ Lever and Drip Less Spout	2.8 (1.3)
11904180	with Two Notch Hold Open Clip, EZ Lever, Drip Less Spout and Flo-Equalizer®	2.8 (1.3)

New Cold Weather Unleaded Nozzles

MODEL NO.	DESCRIPTION	SHIPPING WEIGHT LBS (KG)
1474504	with Two Notch Hold Open Clip, EZ Lever and Drip Less Spout	2.8 (1.3)

Construction

Body	One piece die cast aluminum
Seals	Fluorocarbon
Packing	Double o-ring seal protected by fiber reinforced Teflon®
Lever	Two piece high impact polymer
Inlet	¾" / 19.1 mm NPT

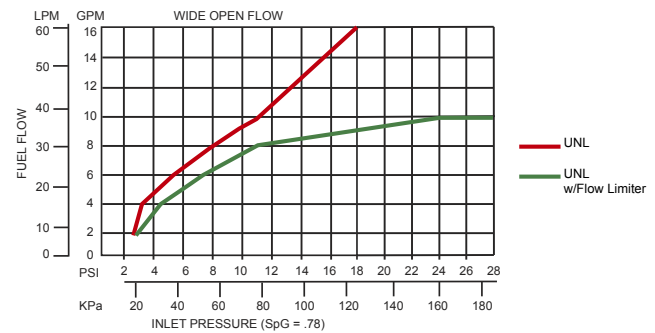

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

**Husky**

GENERAL FUELING PRODUCTS

Enhanced Conventional (ECO) Nozzles

Automatic shut-off conventional nozzle equipped with a mechanical interlock that shuts off the nozzle if it falls from the fill tank.

Dimensions and System Options

Safe-T-Breaks®

MODEL NO.	DESCRIPTION
002273	¾" F x ¾" F NPT Non-Reconnectable Safe-T-Break®
003360	¾" F x ¾" F NPT Reconnectable Safe-T-Break®
005230	¾" F x ¾" F NPT Low Pull Reconnectable
006130	¾" F x ¾" F NPT Non-Reconnectable PCC Safe-T-Break®
008330	¾" F x ¾" F NPT Reconnectable MagBreak®

Swivels

MODEL NO.	DESCRIPTION
000350	¾" M x ¾" F NPT Multi-Plane Swivel
000355	¾" M x ¾" F NPT Multi-Plane Swivel Anodized Black
002272	¾" M x ¾" F NPT 90° Pump Swivel
002950	¾" M x ¾" F NPT Multi-Plane Restricted Swivel

Swivel/Safe-T-Break® Combos

MODEL NO.	DESCRIPTION
006310	¾" M NPT Multi-Plane Swivel connected to ¾" F NPT Reconnectable Safe-T-Break®

Spouts


MODEL NO.	DESCRIPTION
013664	Unleaded ECO Spout Assembly Kit

Pressure/Vacuum Vents

MODEL NO.	DESCRIPTION
004620	2" Slip-On Pressure Vacuum Vent
004885	2" Thread-On Pressure Vacuum Vent - NPT
005885	2" Thread-On Pressure Vacuum Vent with Internal Screen - NPT
005041	3" Thread to 2" Adaptor - NPT

Guards

MODEL NO.	DESCRIPTION
014034	Full Grip Nozzle Guard

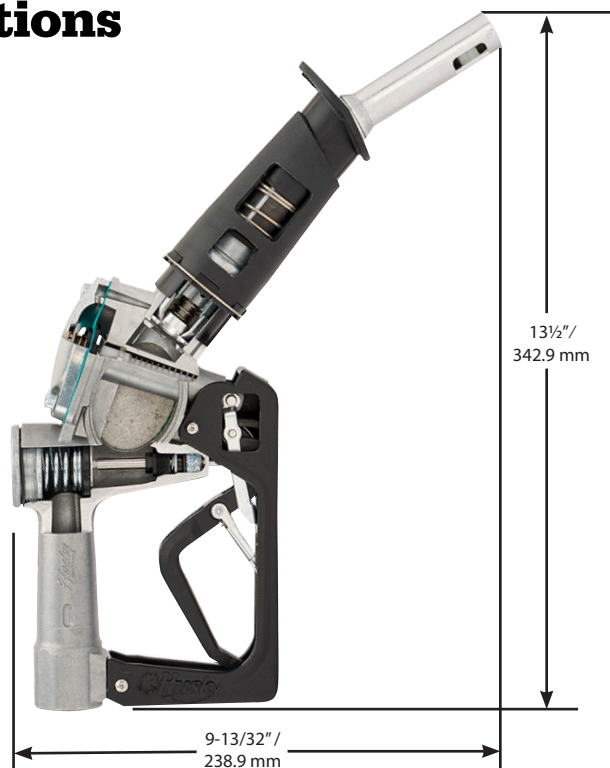

Accessories, Testing and Maintenance

MODEL NO.	DESCRIPTION
004490	Conventional Flo-Equalizer® - 10 gpm / 37.9 Lpm
003593	Hold Open Clip Kit
007490	Internal Flo-Equalizer® - 10 gpm / 37.9 Lpm
000397	Unleaded Spout Gauge

Low Perm Hoses

MODEL NO.	DESCRIPTION
CP12LP8.5	¾" Low Perm Hardwall 8.5' Assembly Hose
CP12LP8.5SV	¾" Low Perm Hardwall 8.5' Assembly Hose Swivel
CP12LP9	¾" Low Perm Hardwall 9' Assembly Hose
CP12LP9SV	¾" Low Perm Hardwall 9' Assembly Hose Swivel
CP12LP.75	¾" Low Perm Hardwall 9" Assembly Hose
CP12LP.75SV	¾" Low Perm Hardwall 9" Swivel Assembly Hose



2325 Husky Way • Pacific, MO 63069
 (800) 325-3558 • Fax (636) 825-7300
www.husky.com • sales@husky.com

MADE IN THE U.S.A.

