
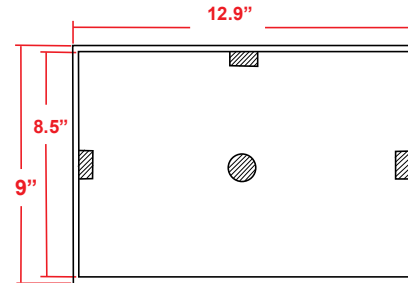


FORWARD THROW WALL PACK

WMFT SERIES

Patent pending optics combine with an industry standard wall pack housing to bring you revolutionary light distribution from a familiar fixture.



CONSTRUCTION & COMPATIBILITY

- Heavy duty LEDs
- Patent pending optics direct 90% of light downward and outward
- Standard sized wall pack housing with prismatic lens
- "Hands-free" wiring with knockouts on back & sides
- Available standard in durable bronze and white powder coat
- Compatible with 0-10V dimming controls
- Compatible with many photocells & motion sensors

ELECTRICAL & LIGHT OUTPUT SPECIFICATIONS

MODEL	# LEDS	INPUT	POWER	LUMENS	CCT	CRI	PF
WMFT-100	1	120-277V 50/60 Hz	28W	2,812 lm	5000K	>70	>.9
WMFT-250	2		53W	4,974 lm			
WMFT-320	3		77W	7,583 lm			
WMFT-250-HV	2	347-480V 50/60 Hz	54W	5,235 lm			

ORDERING CHART

PRODUCT FAMILY

WMFT SERIES:
WALL MOUNTED
FORWARD THROW

METAL HALIDE EQUIVALENT

100 (100W equivalent, 28W)
250 (250W equivalent, 53W)
320 (320W equivalent, 77W)

INPUT VOLTAGE

(120-277V
standard - blank)
HV (347-480V "high
voltage" - **250 ONLY**)

FINISH

BRZ (bronze)
WHT (white)