


# POLE MOUNTED AREA LIGHT

# AR3 SERIES

The AR3 series is bright, efficient, and highly adaptable for many applications including parking lot, roadway, and flood lighting. All AR3 models are compatible with all Jarvis Lighting tenons, brackets, and bullhorns - ask your Jarvis Lighting representative for more details.

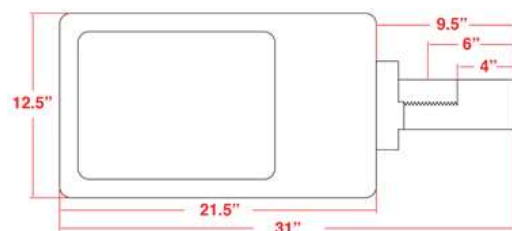

## CONSTRUCTION & COMPATIBILITY

- Heavy duty LEDs
- Specular aluminum reflectors create forward throw optics
- Other optic distributions available - contact Jarvis Lighting for more options
- Die cast aluminum housing with tempered glass lens and durable powder coat finish
- Adjustable mounting piece mounts up to 2.4" in diameter
- Compatible with all Jarvis Lighting tenons, bullhorns, and brackets
- Available with 0-10V dimming compatibility - see ordering chart below

## ELECTRICAL & LIGHT OUTPUT SPECIFICATIONS

MODEL	# LEDs	INPUT	POWER	LUMENS	CCT	CRI	PF
AR3-90	3	120-277V 50/60 Hz	90W	8,100 lm	5000K	>70	>.9
AR3-120	4	-OR- <b>347-480V</b> 50/60 Hz	109W	12,170 lm			
AR3-150	5	(see ordering chart below)	136W	15,440 lm			

\* Models AR3-120, AR3-150, AR3-150-HV are all DesignLights Consortium™ Qualified Products.

## ORDERING CHART

PRODUCT FAMILY	APPROX WATTAGE & EQUIVALENT†	INPUT VOLTAGE	0-10V DIMMING	FINISH
<b>AR3</b> SERIES: POLE MOUNTED AREA LIGHT	<b>90</b> (90W, 300W replacement) <b>120</b> (109W, 400W replacement) <b>150</b> (136W, 400-500W replacement) † "Equivalent" refers to the wattage of an equivalent metal halide fixture in terms of light output.	(120-277V standard - blank) <b>HV</b> (347-480V input, "high voltage")	(no 0-10V dimming-leave blank) <b>DM</b> (0-10V dimming leads required)	<b>BRZ</b> (bronze) <b>WHT</b> (white) <b>BLK</b> (black)

