

HUSKY V3 NOZZLE

VACUUM ASSIST NOZZLE GILBARCO, SCHLUMBERGER, HASSTECH

Pressure Activated Vacuum Assist Nozzle for self service, full service and unattended stations.

- V3 Nozzle shuts off when:
 - the pump shuts off.
 - the gas tank is full.
 - the lever is opened before the pump is turned on.
 - the leak detector has not completed the test cycle.
- Husky vapor return line is an internal part of the body casting, thus eliminating potential vapor leak points.
- Uses coaxial spout with spout spring and has large vapor-capturing holes at the end of the spout.
- Nozzle spout and spout spring are covered by a one year warranty.
- V3 Nozzle is equipped with a unique Flo-Stop™ device that shuts off the nozzle if it falls from the fill tank or raises above the horizontal.
- Plunger design provides a better seal to eliminate potential leaking and staining.



SPECIFYING INFORMATION

Model Number	Description	Shipping Weight lbs (kg)
6201049	New, Unleaded, with Three Notch Hold Open Clip	3.6 (1.6)
6201089	New, Unleaded, without Hold Open Clip	3.6 (1.6)
6241049	Rebuilt, Unleaded, with Three Notch Hold Open Clip	3.6 (1.6)
6241089	Rebuilt, Unleaded without Hold Open Clip	3.6 (1.6)

CONSTRUCTION

Body	Aluminum
Seals	Fluorocarbon
Packing	Fiber Reinforced Teflon Double O-ring Seal
Lever	One piece contoured steel with hard plastic cover
Inlet	M34 x 1.5

LISTINGS



Listings:



AIR RESOURCES BOARD



MADE IN THE U.S.A.




HUSKY V3 NOZZLE

VACUUM ASSIST NOZZLE

GILBARCO, SCHLUMBERGER, HASSTECH

- **Dimensions**
- **Accessories**

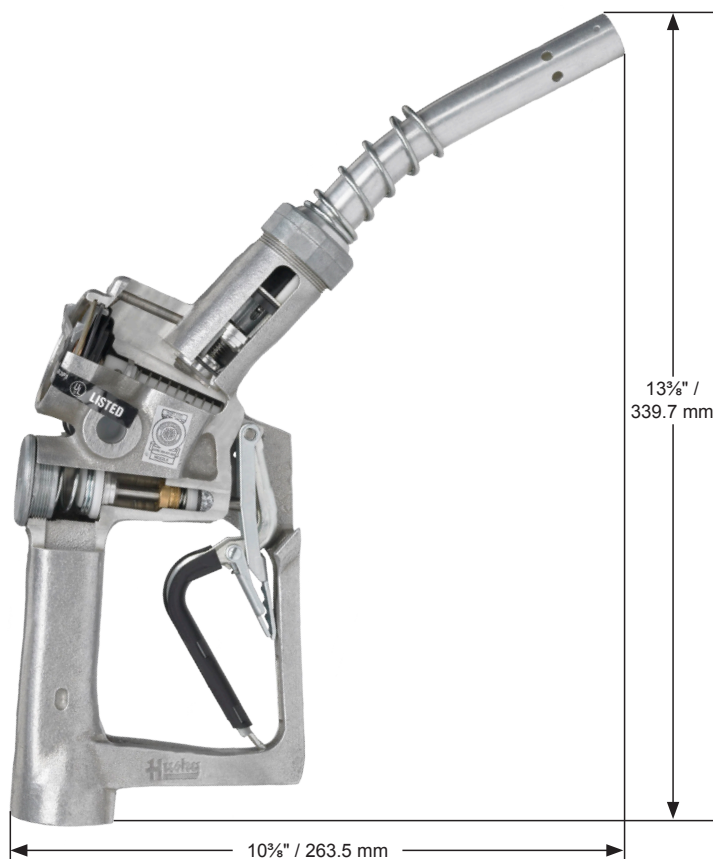

Safe-T-Breaks®

Model No.	Description
4034	Reconnectable Safe-T-Break®
4034A	Reconnectable Safe-T-Break® - Atex
6210	Non-Reconnectable Safe-T-Break®
5134A	Non-Reconnectable Safe-T-Break® - Atex

Swivel

Model No.	Description
4605	Inverted Vapor Assist Swivel

Pressure / Vacuum Vents

Model No.	Description
4620	2" Slip-On Pressure Vacuum Vent
4885	2" Thread-On Pressure Vacuum Vent - NPTF
5885	2" Thread-On Pressure Vacuum Vent with internal screen - NPTF
7525	2" Thread-On Pressure Vacuum Vent - BSPT
7457	2" Thread-On Pressure Vacuum Vent with internal screen - BSPT
5041	3" Thread to 2" Thread Pipe Adaptor
5426	Pressure Vacuum Vent Test Adaptor

Spouts

Model No.	Description
6289	Complete Spout Assembly Kit - Unleaded
6389	Unleaded Spout

Guards

Model No.	Description
5170	Full Grip Guard
5169	Full Grip Reguard
6955	Waffle Splash Guard
5494	Lever Guard

Flo-Equalizers™

Model No.	Description
5837	Vapor Assist Flo-Equalizer™

Testing Equipment

Model No.	Description
7089	Nozzle Service Kit
3593	Hold Open Clip Kit
0397	Unlead Spout Gauge
4360	Air/Liquid Spout Adaptor
5260	Tool for dry Air/Liquid Test
5233	O-ring Kit

